



A&B EQUIPMENT INC.

EAGLE LINE

2315 U.S. Highway 11 S. Sweetwater, TN. 37874-5059


PHONE: (423) 337-2390 FAX: (423) 337-2338

EMAIL: sales@ab-eagleline.com WEBSITE: www.ab-eagleline.com



COMPACT TRACTOR PLOW:

12"

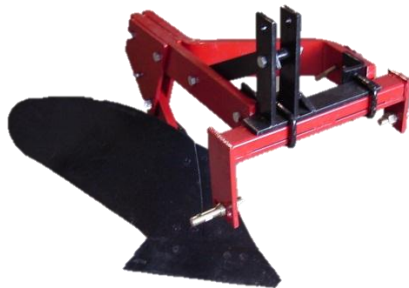


- *AVAILABLE WITH 12" BOTTOM ONLY
- *1" X 4" FRAME MEMBERS
- *1" X 3" VERTICAL BEAMS
- *1/2" X 2 1/2" A-FRAME
- *3 POINT HITCH WITH REPLACEABLE CAT. 1 LIFT ARM PINS
- *REPLACEABLE SHIN, SHARE, AND MOLDBOARD
- *ADJUSTABLE WIDTH OF CUT (HILL SIDE)
- *SHEAR BOLT PROTECTION
- *GRADE 5 HEAT TREATED AND PLATED FASTENERS
- *COMES ASSEMBLED, INSTALL A-FRAME AND READY TO USE
- *15-25 HP RECOMMENDED
- *OPTIONAL: GAUGE WHEEL WITH BALL BEARINGS

MODEL NO	WEIGHT
1BP12CT	217 LB.

ONE BOTTOM PLOW:

12", 14", OR 16"

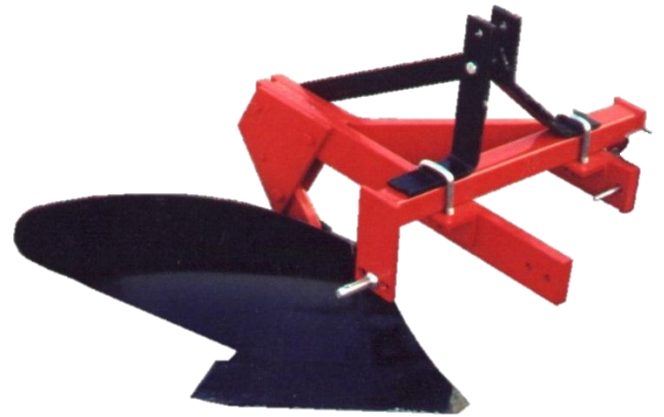

- *AVAILABLE WITH 12", 14" OR 16" BOTTOM
- *1" X 4" FRAME MEMBERS
- *1" X 3" VERTICAL BEAMS
- *1/2" X 2 1/2" A-FRAME
- *3 POINT HITCH WITH REPLACEABLE CAT. 1 LIFT ARM PINS
- *REPLACEABLE SHIN, SHARE, AND MOLDBOARD
- *ADJUSTABLE WIDTH OF CUT (HILL SIDE)
- *SHEAR BOLT PROTECTION
- *GRADE 5 HEAT TREATED AND PLATED FASTENERS
- *COMES ASSEMBLED, INSTALL A-FRAME AND READY TO USE
- *15-30 HP RECOMMENDED
- *OPTIONAL: COULTER AND GAUGE WHEEL WITH BALL BEARINGS

MODEL NO	WEIGHT
1BP12	256 LB.
1BP14	256 LB.
1BP16	262 LB.



A&B EQUIPMENT INC.

EAGLE LINE

2315 U.S. Highway 11 S. Sweetwater, TN. 37874-5059


PHONE: (423) 337-2390 FAX: (423) 337-2338

EMAIL: sales@ab-eagleline.com WEBSITE: www.ab-eagleline.com



TWO BOTTOM PLOW:

12", 14", 16"

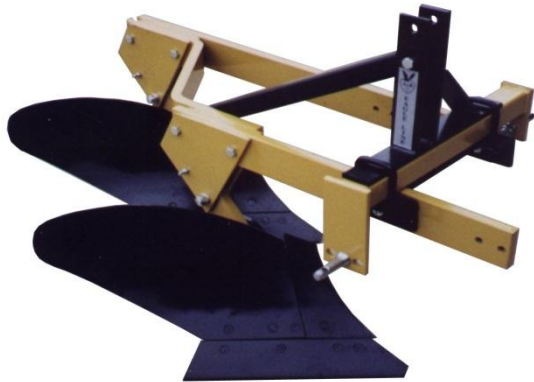

- *AVAILABLE WITH 12", 14" OR 16" BOTTOMS
- *1" X 4" FRAME MEMBERS
- *1" X 3" VERTICAL BEAMS
- *1/2" X 2 1/2" A-FRAME
- *3 POINT HITCH WITH REPLACEABLE CAT 1 LIFT ARM PINS
- *REPLACEABLE SHINS, SHARES, AND MOLDBOARDS
- *ADJUSTABLE WIDTH OF CUT (HILL SIDE)
- *SHEAR BOLT PROTECTION
- *GRADE 5 HEAT TREATED AND PLATED FASTENERS
- *COMES ASSEMBLED, INSTALL A-FRAME AND READY TO USE
- *25 - 40 HP RECOMMENDED
- *OPTIONAL: COULTERS AND GAUGE WHEEL WITH BALL BEARINGS

MODEL NO	WEIGHT
2BP12	411 LB.
2BP14	411 LB.
2BP16	423 LB.

THREE BOTTOM PLOW:

14", 16"



- *AVAILABLE WITH 12", 14" OR 16" BOTTOMS
- *1" X 4" FRAME MEMBERS
- *1" X 3" VERTICAL BEAMS
- *1/2" X 2 1/2" A-FRAME
- *3 POINT HITCH WITH REPLACEABLE CAT 2 LIFT ARM PINS
- *REPLACEABLE SHINS, SHARES, AND MOLDBOARDS
- *ADJUSTABLE WIDTH OF CUT (HILL SIDE)
- *SHEAR BOLT PROTECTION
- *GRADE 5 HEAT TREATED AND PLATED FASTENERS
- *COMES ASSEMBLED, INSTALL A-FRAME AND READY TO USE
- *35 - 50 HP RECOMMENDED
- *OPTIONAL: COULTERS AND GAUGE WHEEL WITH BALL BEARINGS

MODEL NO	WEIGHT
3BP14	695 LB.
3BP16	713 LB.